



supporto a muro/wall support

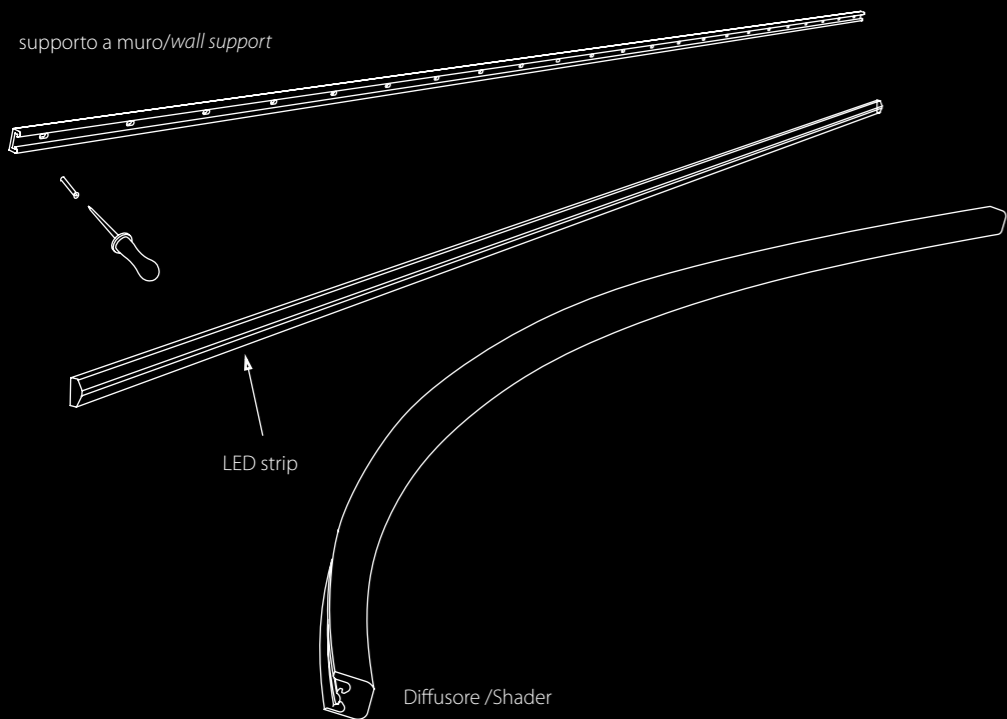


LED strip

Diffusore /Shader

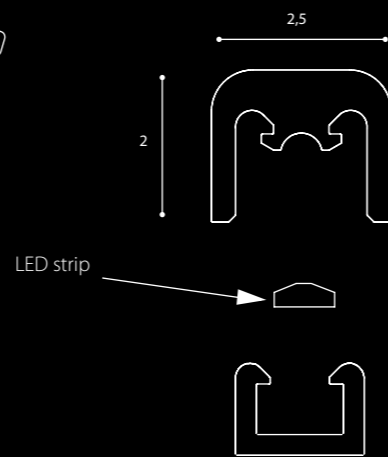


LED strip

Dimensioni reali/Real dimensions

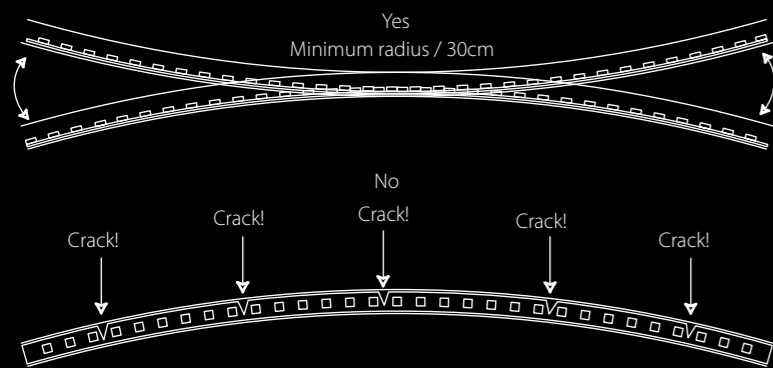

Yes
Minimum radius / 30cm

Crack! Crack! No Crack! Crack! Crack!

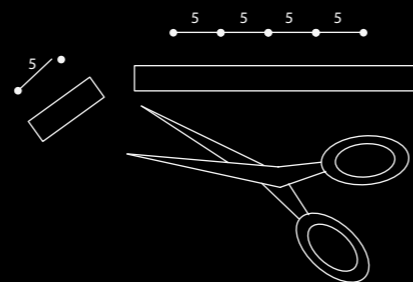

5

ARCHETTO

Custom

design Theo Sogni 2012

Archetto Custom consente di ottenere soluzioni sartoriali di luce: linee di lunghezza variabile fino a 5 metri, particolarmente appropriate nella sottolineatura e nell'illuminazione, mai invasiva, di facciate, vetrine, percorsi di luce, installazioni.

Alimentazione: 24v.
Led bianco: 3000/4000°k, 120 led/mt, 500Lm/mt, 10W mt.
RGB: 120 led/mt, 20w/mt.

Sistemi di controllo: radio / infrarossi / DMX.

A partire da 100 cm si possono richiedere multipli di 5cm. I pezzi sono forniti a misura con cavo di alimentazione lungo 100cm in neoprene. Isolamento/protezione all'acqua IP67.

L min. 100cm - max. 500 cm

Archetto Custom allows to obtain lines of light with extensions dimensional variables up to 5 meters: tailoring solutions particularly appropriate in emphasis and lighting, facades, windows, light paths and installations.

Power: 24v
White led: 4000°k, 120 led/mt, 500Lm/mt, 10w/mt
RGB: 120 led/mt, 20w/mt

Control's system: radio / infrared / DMX.

From 100 cm you can ask multiple of 5 cm. The pieces are provided with suitable power cord 100 cm long neoprene. IP67 Waterproof.

Minimum length 100 cm - max 500 cm

Archetto è un modello depositato
Archetto is a trademark

Driver desktop

24v	35w
24v	70w
24v	120w

Driver

24v	35w
24v	75w
24v	100w
24v	150w

Controllers

Controller infrarosso RGB con telecomando
Infrared controller RGB with remote control


max 140w

Controller radiofrequenza per RGB con telecomando "touch"
Radiofrequency controller for RGB with touch remote control

max 280w

Dimmer radiofrequenza per bianco con telecomando
Radiofrequency dimmer for white with remote control

max 190w

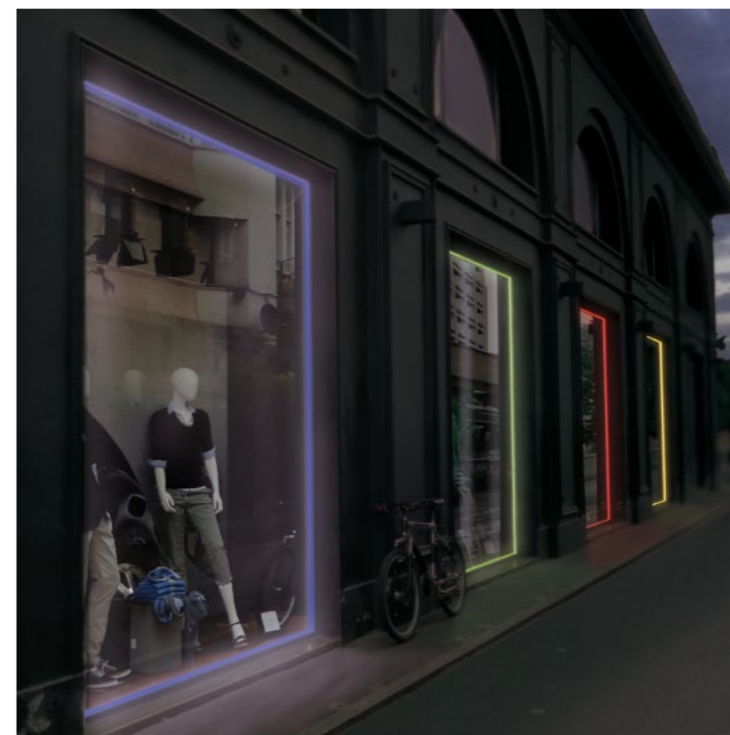

Curva fotometrica
Photometric curve

