

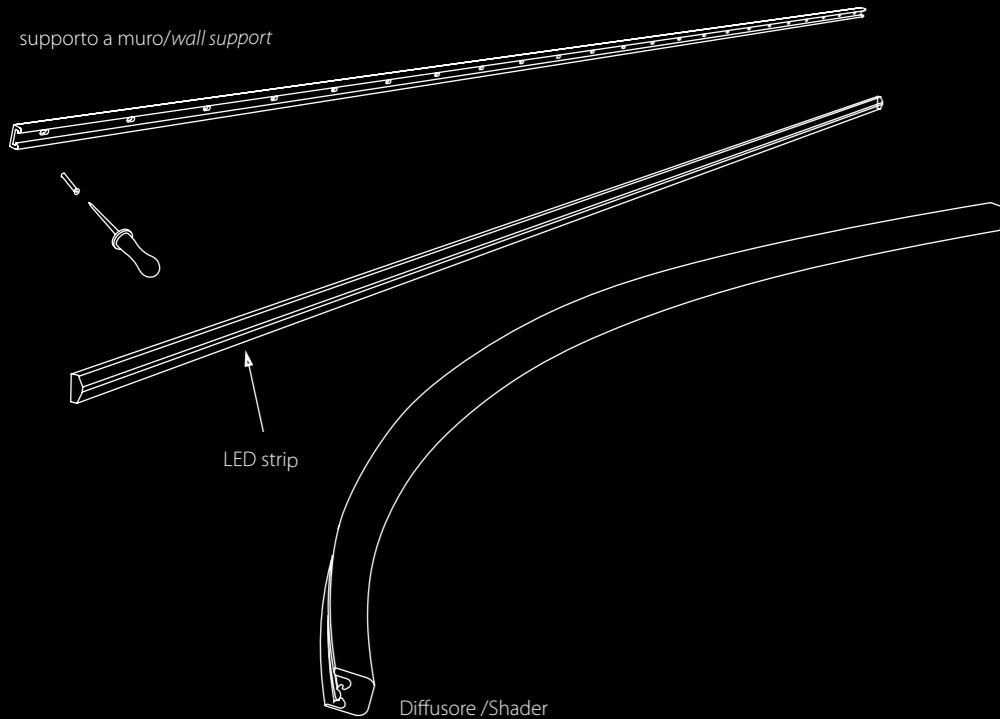
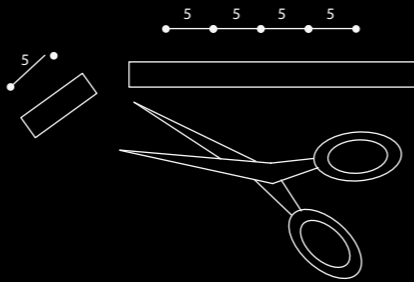


supporto a muro/wall support

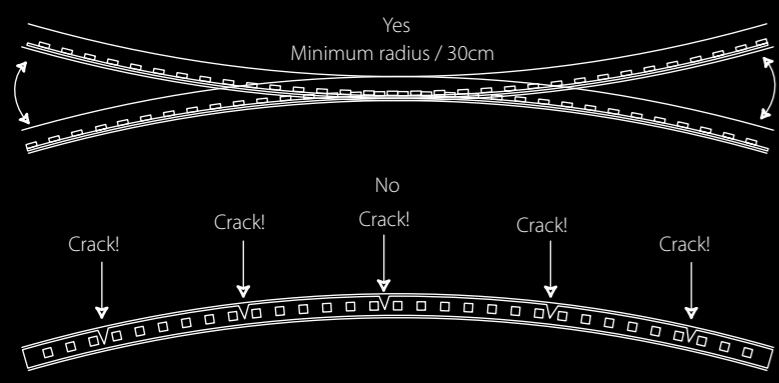

Diffusore /Shader

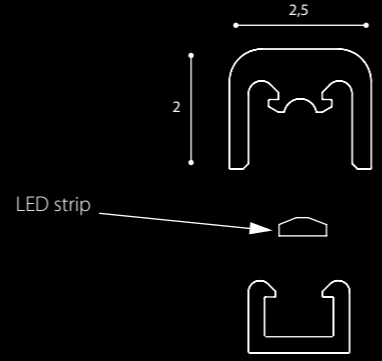

# ARCHETTO

## Custom

design Theo Sogni 2012

Archetto Custom consente di ottenere soluzioni sartoriali di luce: linee di lunghezza variabile fino a 5 metri, particolarmente appropriate nella sottolineatura e nell'illuminazione, mai invasiva, di facciate, vetrine, percorsi di luce, installazioni.  
 Alimentazione: 24v.  
 Led bianco: 3000/4000°k, 120 led/mt, 500Lm/mt, 10W mt.  
 RGB: 120 led/mt, 20w/mt.  
 Sistemi di controllo: radio / infrarossi / DMX.  
 A partire da 100 cm si possono richiedere multipli di 5cm. I pezzi sono forniti a misura con cavo di alimentazione lungo 100cm in neoprene. Isolamento/protezione all'acqua IP67.  
 L min. 100cm - max. 500 cm

*Archetto Custom allows to obtain lines of light with extensions dimensional variables up to 5 meters: tailoring solutions particularly appropriate in emphasis and lighting, facades, windows, light paths and installations.*

Power: 24v  
 White led: 4000°k, 120 led/mt, 500Lm/mt, 10w/mt  
 RGB: 120 led/mt, 20w/mt  
 Control's system: radio / infrared / DMX.  
 From 100 cm you can ask multiple of 5 cm. The pieces are provided with suitable power cord 100 cm long neoprene. IP67 Waterproof.  
 Minimum length 100 cm - max 500 cm

Archetto è un modello depositato  
 Archetto is a trademark

### Drivers

IP67	24v	35w
IP67	24v	60w
IP67	24v	100w
IP67	24v	150w
IP67	24v	240w

### Controllers

Controller radiofrequenza per RGB con telecomando Radiofrequency controller for RGB with remote control	max280w
Dimmer radiofrequenza per bianco con telecomando Radiofrequency dimmer for white with remote control	max190w

### Kit single lamp max 60W power (max 6mt white - max 3mt RGB)

IP66	White
IP66	White Dimmer
IP66	RGB Controller

Curva fotometrica  
 Photometric curve

